# **DRIVE THE CHANGE**











Endless hours of testing and □ne tuning made the C60 the best in its class for performance and reliability. We created a durable machine with maintenance cost close to none.

### UNDERCARRIAGE



Our undercarriage is like no one. Our Cormidi R&D department put all its experience towards creating the best undercarriage available on the market.

## SIMPLY INCREDIBLE



The Cormidi design lab created a machine that mixes industrial design with strength, power and easy to use







#### STRENGTHS



the machine's undercarriage, unique to the Cormidi line, has suspensions follow the terrain profile for increased stability and comfort.



4 Large and sturdy hooks to move the machine in total safety, plus 2 for towing.



C60 has all approved and certified safety support, making it one of the most secure unit in the world.



the operators has a perfect access to all the controls and can keep all the parameters under control.



Mechanical parking and emergency brake.



Complete with horn, throttle, and 12V outlet.



the design of the engine compartment allows easy access to all the component for routine maintenance. Iic system.



The C60 has a powerful radiator with fan and thermostat to cool the hydraulic system.



when the situation needs a shorter unit, the stand can be closed, otherwise it opens to let the operator in.







### THE BENCHMARK



with its 5 models and 20 possible version it can be tailored to answer anyone's need.

#### HEAVY DUTY



with increased safety, incredible performance and still easy to drive the C60 is at the top of its class

## STURDY AND POWERFUL



Long lasting undercarriage, reduce need for maintenance, incredible power and reduced fuel consumption make the c60 an incredible unit.












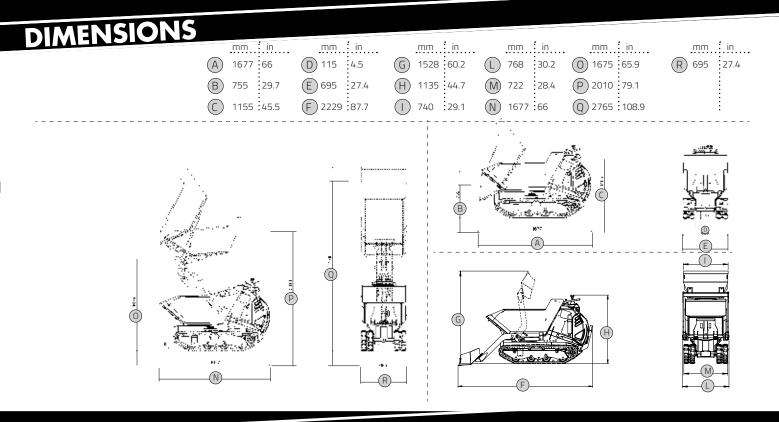


#### CAPACITY

BE-DE-BHE IE-ACDHE-DEAC	WATER 0,15 m³ 0,2 yd³	STRUCK 0,22 m <sup>3</sup> 0,29 yd <sup>3</sup>	HEAPED SAE 0,28 m <sup>3</sup> 0,37 yd <sup>3</sup>
RIA		5TRUCK 0,13 m <sup>3</sup> 0,17 yd <sup>3</sup>	SAE 0,21 m <sup>3</sup> 0,27 yd <sup>3</sup>

## **TECHNICAL DATA**

		MET	RIC	U.S.		6.60	9.60	
ENGINE						ĺ		
Petrol	Honda GX 270 9 hp						•	
Diesel	Yanmar LA 70 7.5 hp							
	1							
						ļ		
TRANSMISSION								
Туре	Hydrostatic						•	
Hydraulic pump	n°3 Gear pump						•	
TRACKS								
Crawler width	180 mm (7.1 in)				•	•		
Rocking rollers	Yes					•	•	
HYDRAULIC SYSTEM							•	
Hydraulic pump	Hydraulic pump Gear pump							
Flow	1x16 l/min (1x4.2 gpm)					•	•	
						ĺ		
max pressure	170 ba			(2466 psi)		•	•	
PERFORMANCE AND DIM	ENSIONS							
Max. travel speed	approx 0-3.6 Km/h			(0-2.3 mph)		•	•	
Operative weight	600 kg (1320 LB)					•	•	
· · ·	BE 463 kg /1021 lb BHE 552 kg /1217 lb ACE		BE 506 kg /1116 lb ACBHE 628 kg /1385 lb			•		
Weight	<b>DE</b> 476 kg /1049 lb	<b>DHE</b> 567 kg / 1250 Lb	DEA	<b>C</b> 520 kg / 1146 Lb	<b>ACDHE</b> 638 kg / 1407 Lb	•		
Vessel contents	'essel contents 0,25 m <sup>3</sup> - 0,33 yd <sup>3</sup>						•	
Parking brake Yes						•	•	

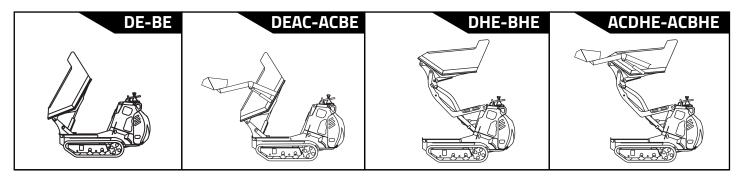



## **DRIVE THE CHANGE**

WWW.CORMIDI.COM



use note: The machines and accessories depicted in brochures and catalogues can vary from version, therefore please consult your distributor for a description of standard accessories and options available for each model. midi reserves the right to change or to modify the specification of the machines without varning. The photos in catalogues and brochures represent the Cormidi machines in Juction at time of printing. However, newer and upgraded models may look different to the photos shown in this catalogue or brochure. Please note:

Via Fonte, 342 Roccadaspide (SA) Italy ph. +39 0828 943688 fax +39 0828 943963



25 Broad St, Norwalk CT 06851, USA ph.+1 203-846-6120 art@cormidiusa.com